
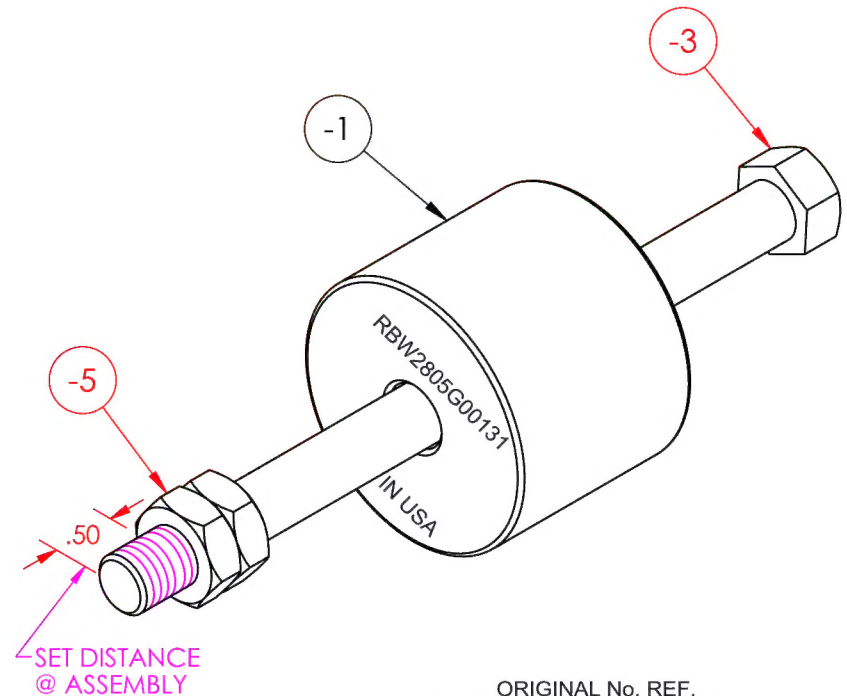
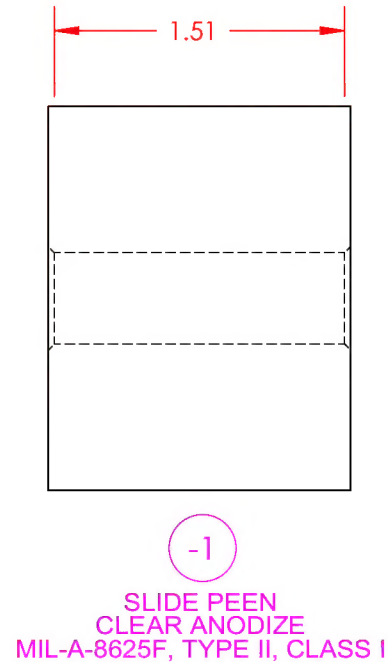


This drawing, specifications, and concepts contained here in are the sole property of Red Barn Machine, and may not be reproduced or used in any fashion without the prior written permission of Red Barn Machine.


REVISIONS				
REV	DESCRIPTION	DATE	INITIAL	APPROVED
1	CHANGED FROM CLEAR HARD ANODIZING TO CLEAR ANODIZING.	10/27/10	WP	RW

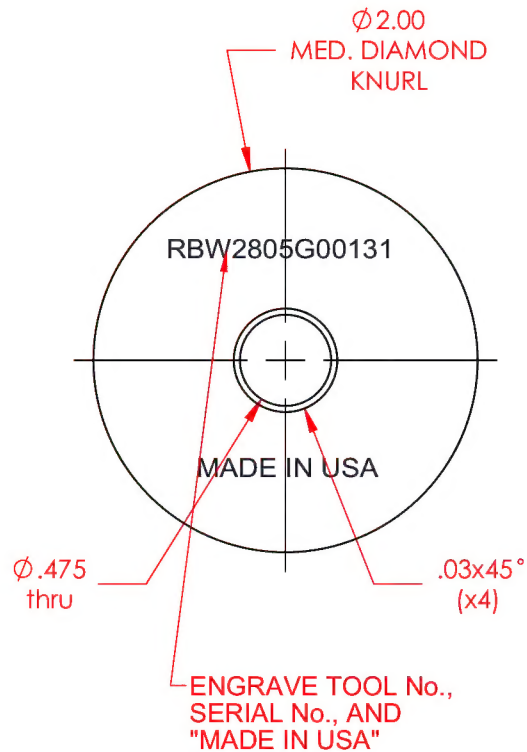

ORIGINAL No. REF.  
RBW2805G00131  $\equiv$  3G2805G00131  
RBW2805G00131-1  $\equiv$  3G2805G00351  
RBW2805G00131-3  $\equiv$  3G2805G00251  
DO NOT USE, FOR REFERENCE ONLY.

FUNCTION: USED TO REMOVE THE FUEL  
BOOST PUMP CARTRIDGE.

ASSY QTY	ASSY QTY	B/O	PART #	UNIT QTY	DESCRIPTION	MATERIAL	B/O INFORMATION OR SPECIFICATIONS
		-1	1	1	SLIDE	6061 RND. BAR	$\phi 2 \times 1-5/8$
		B/O -3	1	1	HEX HEAD CAP SCREW	PLATED, GR.8	7/16-20 UNF x 6 MCMaster-CARR #91257A481
		B/O -5	2	2	JAM NUT	PLATED, GR.8	7/16-20 UNF MCMaster-CARR #93839A820
ASSY #							

 <b>RED BARN MACHINE</b>	
TITLE <b>BOOST PUMP CARTRIDGE REMOVAL TOOL</b>	
DWG NO. <b>RBW2805G00131-3G</b>	REV <b>1</b>
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	
TOLERANCES ON: DECIMALS .XXX $\pm$ .005 .XX $\pm$ .01 .X $\pm$ .1	DRAWN BY: <b>PERRITT</b> APPROVED: <b>D Weil</b> HEAT TREAT FINISH SPEC <b>SEE NOTES</b>
UNLESS OTHERWISE SPECIFIED 1. BREAK ALL SHARP EDGES .015 x 45° PR .015 R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING	
SCALE <b>NTS</b>	DATE <b>12-22-08</b> SHEET <b>1 of 1</b>